



Miami-Dade Hurricane Ready™

Garage Doors



Encore™

The Raynor Encore steel two-sided residential garage door boasts both beauty and practicality. This 2" thick polystyrene insulated door comes in a variety of styles and colors, including the stylish shaker panel, as well as four colors exclusive to this model. The variety of options paired with a gunitite surface texture, embossed panels, and thermal benefits, give homeowners the perfect door to enhance the look of their home.



TradeMark™

The combination of durable, 24 gauge steel, defined raised panel styling and authentic woodgrain texture gives your home curb appeal with TradeMark steel garage doors. Optional polystyrene insulation can be added to provide additional comfort and help keep your garage quieter. TradeMark doors are available in both post and strut designs.



AlumaView® AV300

A full 3" thick, the Raynor AV300 is the sturdiest door in the AlumaView family. The increased thickness adds strength and durability. The integral U-bar construction within the rails of the AV300 creates added strength to the section panels and creates a clean look on the interior of the door by removing trussing obstructions from visible areas.

Hurricane Ready Residential Garage Doors Determine Your Requirements



Step 1:


Determine the minimum wind speed (MPH) your door must meet or exceed from the map below, or go to www.atcouncil.org/windspeed. Determine if wind-borne debris is applicable. See map below.

Wind-borne Debris

The wind-borne debris region is also known as those areas that require the large missile impact rated door and/or windows. In Florida, being farther south and closer to the shoreline, it is more likely a home or building will be in the wind-borne debris region or HVHZ (High Velocity Hurricane Zone - Miami-Dade and Broward counties).

Miami-Dade and Broward Counties require all garage doors meet the large missile impact rating, regardless if the garage door has windows or not.

Insurance companies sometimes give discounts for garage doors and other exterior building products that exceed the local building code, including meeting wind-borne debris requirements not mandated. This means that installing a new garage door with the large missile impact rating may reduce your insurance premiums. Please check with your insurance agent for details.

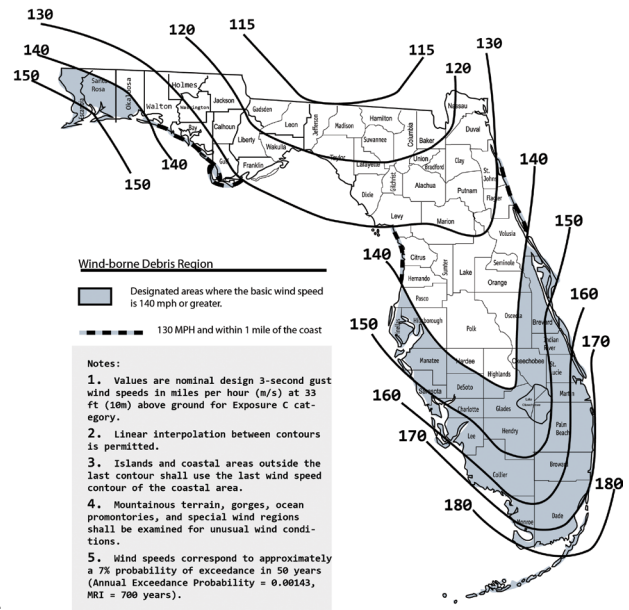

Step 2:

Determine if your home is in an Exposure B, Exposure C or Exposure D region.

Exposure B

Urban and suburban areas, wooded areas or other terrain with numerous closely spaced obstructions.

Exposure C

Open terrain with scattered obstructions, including flat open ground and grasslands. All of Miami-Dade and Broward Counties are Exposure C, unless it meets Exposure D definition.

Exposure D

Within 600 ft. of the ocean front or other large body of water, measuring at least 5,000 ft. across. Contact building code official or DASMA Technical Data Sheet #155t for design pressures.

Step 3:

Determine the structural type of your home: one story or two story.

Step 4:

Using wind speed (MPH), exposure and structural type, find your required design pressure. See chart on opposite page.

Design Pressures

The design wind load pressure rating of a door as expressed in PSF (pounds per square foot). The design pressure of the door must equal or exceed the design pressure for the garage door opening in which a door is to be installed. Design pressure has positive and negative values.

Garage Door Wind Load Guide - Values in PSF

Based On The 2020 Florida Building Code, Exposure B, 100-156 MPH, Ultimate Design Wind Speed											Based On The 2020 Florida Building Code, Exposure B, 156-200 MPH, Ultimate Design Wind Speed																												
Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})										Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})																									
		100 MPH	105 MPH	110 MPH	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	156 MPH	156 MPH			160 MPH	165 MPH	170 MPH	175 MPH	180 MPH	186 MPH	190 MPH	200 MPH																		
15 Feet Single Story	Single 9' x 7'	9.6	9.6	9.6	10.2	11.1	13.1	15.2	17.4	18.8	-9.6	-9.6	-10.6	-11.6	-12.6	-14.8	-17.1	-19.7	-21.3	15 Feet Single Story	Single 9' x 7'	18.8	19.8	21.0	22.3	23.7	25.0	26.7	27.9	30.9	-21.3	-22.4	-23.8	-25.3	-26.8	-28.3	-30.2	-31.5	-35.0
	Double 16' x 7'	9.6	9.6	9.6	9.8	10.7	12.5	14.5	16.7	18.0	-9.6	-9.6	-10.0	-10.9	-11.9	-13.9	-16.2	-18.6	-20.1		Double 16' x 7'	18.0	19.0	20.2	21.4	22.7	24.0	25.6	26.7	29.6	-20.1	-21.1	-22.5	-23.9	-25.3	-26.7	-28.6	-29.8	-33.0
25 Feet Double Story	Single 9' x 7'	9.6	9.9	10.8	11.8	12.9	15.1	17.5	20.1	21.8	-10.1	-11.2	-12.2	-13.4	-14.6	-17.1	-19.8	-22.8	-24.6	25 Feet Double Story	Single 9' x 7'	21.8	22.9	24.4	25.9	27.4	29.0	31.0	32.3	35.8	-24.6	-25.9	-27.5	-29.2	-31.0	-32.8	-35.0	-36.5	-40.5
	Double 16' x 7'	9.6	9.6	10.4	11.3	12.3	14.5	16.8	19.3	20.9	-9.6	-10.5	-11.6	-12.6	-13.8	-16.2	-18.7	-21.5	-23.3		Double 16' x 7'	20.9	21.9	23.3	24.8	26.3	27.8	29.7	30.9	34.3	-23.3	-24.5	-26.0	-27.6	-29.3	-31.0	-33.1	-34.5	-38.2

Based On The 2020 Florida Building Code, Exposure C, 100-150 MPH, Ultimate Design Wind Speed											Based On The 2020 Florida Building Code, Exposure C, 156-200 MPH, Ultimate Design Wind Speed																										
Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})										Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})																							
		100 MPH	105 MPH	110 MPH	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	156 MPH	160 MPH			165 MPH	170 MPH	175 MPH	180 MPH	186 MPH	190 MPH	200 MPH																	
15 Feet Single Story	Single 9' x 7'	11.7	12.9	13.9	15.2	16.6	19.6	22.4	25.9	-13.2	-14.6	-15.7	-17.2	-18.8	-22.2	-25.3	-29.2	15 Feet Single Story	Single 9' x 7'	28.1	29.5	31.5	33.5	35.5	37.1	39.8	41.5	46.2	-31.8	-33.4	-35.6	-37.8	-40.2	-42.0	-45.0	-46.9	-52.2
	Double 16' x 7'	11.2	12.4	13.3	14.6	15.9	18.8	21.5	24.8	-12.5	-13.8	-14.8	-16.2	-17.7	-20.9	-23.9	-27.6		Double 16' x 7'	26.9	28.3	30.1	32.1	34.0	35.5	38.2	39.8	44.2	-30.0	-31.5	-33.6	-35.7	-37.9	-39.6	-42.5	-44.3	-49.3
25 Feet Double Story	Single 9' x 7'	12.9	14.3	15.4	16.8	18.4	21.7	24.8	28.6	-14.6	-16.1	-17.4	-19.0	-20.8	-24.5	-28.0	-32.3	25 Feet Double Story	Single 9' x 7'	31.1	32.7	34.8	37.0	39.3	41.1	44.1	45.9	51.1	-35.2	-36.9	-39.3	-41.8	-44.4	-46.4	-49.8	-51.9	-57.7
	Double 16' x 7'	12.4	13.7	14.7	16.1	17.6	20.8	23.7	27.4	-13.8	-15.3	-16.4	-18.0	-19.6	-23.1	-26.5	-30.5		Double 16' x 7'	29.8	31.3	33.3	35.5	37.6	39.3	42.2	44.0	48.9	-33.2	-34.9	-37.2	-39.5	-42.0	-43.8	-47.0	-49.0	-54.5

Based On The 2020 Florida Building Code, Exposure D, 100-150 MPH, Ultimate Design Wind Speed											Based On The 2020 Florida Building Code, Exposure D, 156-200 MPH, Ultimate Design Wind Speed																										
Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})										Mean Roof Height	Door Size	Ultimage Design Wind Speed, MPH (V _{ult})																							
		100 MPH	105 MPH	110 MPH	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	156 MPH	160 MPH			165 MPH	170 MPH	175 MPH	180 MPH	186 MPH	190 MPH	200 MPH																	
15 Feet Single Story	Single 9' x 7'	14.2	15.7	16.8	18.4	20.1	23.8	27.2	31.3	-16.0	-17.7	-19.0	-20.8	-22.8	-26.8	-30.7	-35.4	15 Feet Single Story	Single 9' x 7'	34.1	35.8	38.1	40.6	43.1	45.0	48.3	50.3	55.9	-38.5	-40.5	-43.1	-45.9	-48.7	-50.8	-54.6	-56.9	-63.2
	Double 16' x 7'	13.6	15.0	16.1	17.7	19.3	22.7	26.0	30.0	-15.1	-16.7	-18.0	-19.7	-21.5	-25.4	-29.0	-33.4		Double 16' x 7'	32.6	34.3	36.5	38.8	41.2	43.1	46.2	48.2	53.6	-36.4	-38.2	-40.7	-43.3	-46.0	-48.0	-51.5	-53.7	-59.7
25 Feet Double Story	Single 9' x 7'	15.4	17.0	18.3	20.1	21.9	25.8	29.5	34.1	-17.4	-19.2	-20.7	-22.7	-24.7	-29.2	-33.4	-38.5	25 Feet Double Story	Single 9' x 7'	37.1	38.9	41.5	44.1	46.8	48.9	52.5	54.7	60.8	-41.9	-44.0	-46.9	-49.9	-52.9	-55.3	-59.3	-61.8	-68.7
	Double 16' x 7'	14.7	16.3	17.5	19.2	21.0	24.7	28.3	32.6	-16.4	-18.2	-19.5	-21.4	-23.4	-27.6	-31.5	-36.4		Double 16' x 7'	35.5	37.3	39.7	42.2	44.8	46.8	50.3	52.4	58.2	-39.6	-41.6	-44.3	-47.1	-50.0	-52.2	-56.0	-58.4	-64.9



Hurricane Ready™ Reinforcing System

Horizontal Trussing



Raynor Hurricane Ready reinforcing systems utilize horizontal trussing, made from high-tensile steel box struts or u-bars, to create a door system built to withstand hurricane force winds.



Single or double end stiles are provided depending on wind load specifications. Both feature Raynor's heavy-duty diamond hinges.



Raynor's patented box strut design features a yellow cap at each end for safety and visibility.



Raynor's high-strength rollers are designed and tested to withstand hurricane force winds.

AlumaView® AV300

A full 3" thick, the Raynor AV300 is the sturdiest door in the AlumaView family. The increased thickness adds strength and durability. The integral U-bar construction within the rails of the AV300 creates added strength to the section panels and creates a clean look on the interior of the door by removing trussing obstructions from visible areas.

Door Sections*	Hardware/Springs*
5 years	Hardware track & springs: 1 year

*See www.raynor.com/products for complete Limited Warranty details.



2017 FLORIDA BUILDING CODE DESIGN LOADS FOR CATEGORY II OCCUPANCY

Wind speed in Miles Per Hour (MPH) is for reference purposes only: reference the wind speed conversion charts for exact Design Loads or local Authority Having Jurisdiction (AHJ) to insure the door being specified meets the required Design Loads. Wind speeds in the charts are Ultimate Design Wind Speeds for 2017 Florida Building Code (FBC) Exposure B. Doors are rated by Design Loads, not Miles Per Hour. Design pressures may vary between door line. Refer to drawings for exact design load pressures.

Door Width	200+ MPH
9' Wide	D: P-3338 (45.0/-52.0)
10' Wide	D: P-3338 (45.0/-52.0)
12' Wide	D: P-3338 (45.0/-52.0)
16' Wide	D: P-3338 (45.0/-52.0)

D Dade Co. Approved *P-xxxx = Drawing Number

Colors

Standard Anodized Base Colors



Optional Elegant Finish Woodtones™




Optional



Choose from over 188 Raynor ArmorBrite™ powder coat colors.

The swatches shown on monitors and printed materials may vary from the actual color. For a true representation of the color, visit your local Raynor Dealer.

Hardware



EnduraCote™

The EnduraCote Hardware System is optional on AlumaView® doors. Powder coated hardware and nylon rollers provides a finished, clean look to your door.



Galvanized Steel

The galvanized hardware come standard on AlumaView doors.

Encore™ EN200

The Raynor Encore steel two-sided residential garage door boasts both beauty and practicality. This 2" thick polystyrene insulated door comes in a variety of styles and colors, including the stylish shaker panel, as well as four colors exclusive to this model. The variety of options paired with a gunite surface texture, embossed panels, and thermal benefits, give homeowners the perfect door to enhance the look of their home.

Door Sections*	Hardware/Springs*	Calculated R-Value
"For As Long As You Own Your Home," against rust and defects in material and workmanship. Certain restrictions apply to corrosive airborne substances.	Industry: Galvanized Hardware & Springs: 3 years Raynor: Galvanized: 6-years hardware, 3 years springs EnduraCote: For as long as your own your home	10.0 [†]

*See www.raynor.com/products for complete Limited Warranty details.
†Pending testing in accordance with DASMA TDS-163




2017 FLORIDA BUILDING CODE DESIGN LOADS FOR CATEGORY II OCCUPANCY

Wind speed in Miles Per Hour (MPH) is for reference purposes only: reference the wind speed conversion charts for exact Design Loads or local Authority Having Jurisdiction (AHJ) to insure the door being specified meets the required Design Loads. Wind speeds in the charts are Ultimate Design Wind Speeds for 2017 Florida Building Code (FBC) Exposure B. Doors are rated by Design Loads, not Miles Per Hour. Design pressures may vary between door line. Refer to drawings for exact design load pressures.

Door Width	200+ MPH
Up to 9'-2" Wide	D: 3352 (65.0/-72.0)
Up to 16'-2" Wide	D: P-3350 (45.0/-52.0)
Up to 18'-2" Wide	D: 3350 (+40.0/-46.0)

D Dade Co. Approved *P-xxxx = Drawing Number

Panel Options

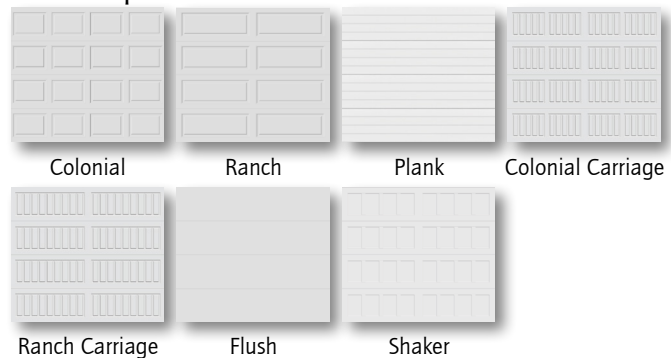


Colors

Standard Solid Color



Optional Solid Color



Optional Single Directional Woodtones



The swatches shown on monitors and printed materials may vary from the actual color. For a true representation of the color, visit your local Raynor Dealer. Greywood and Mocha doors will come standard with black impact frames and inserts for impact windows.

Hardware



EnduraCote™

The EnduraCote Hardware System is Optional on Encore™ doors and features extended-life black powder



Galvanized Steel

The galvanized hardware come standard on Encore™ doors.

coated torsion springs and white powder coated track and hinges. Heavy-duty nylon rollers also help to provide superior noise reduction.

TradeMark™

The combination of durable, 24 gauge steel, defined raised panel styling and authentic woodgrain texture gives your home curb appeal with TradeMark steel garage doors. Add charm with colonial or ranch panels, or for a more distinctive look on your home, choose the carriage house option. Optional polystyrene insulation can be added to provide additional comfort and help keep your garage quieter. TradeMark doors are available in both post and strut designs.

Door Sections*	Hardware/Springs*	Calculated R-Value
"For As Long As You Own Your Home," against rust. Certain restrictions apply to corrosive airborne substances.	Hardware: 6 years Springs: 3 years	6.6 with optional insulation

*See www.raynor.com/products for complete Limited Warranty details.




2017 FLORIDA BUILDING CODE DESIGN LOADS FOR CATEGORY II OCCUPANCY

Wind speed in Miles Per Hour (MPH) is for reference purposes only: reference the wind speed conversion charts for exact Design Loads or local Authority Having Jurisdiction (AHJ) to insure the door being specified meets the required Design Loads. Wind speeds in the charts are Ultimate Design Wind Speeds for 2017 Florida Building Code (FBC) Exposure B. Doors are rated by Design Loads, not Miles Per Hour. Design pressures may vary between door line. Refer to drawings for exact design load pressures.

Door Size	200+ MPH
9' Wide	D: P-3307 (65.0/-75.0)
10' Wide	D: P-3307 (56.4/-65.1)
12' Wide	D: P-3307 (56.4/-65.1)
16' Wide	D: P-3307 (45.0/-52.0)
18' Wide	D: P-3308 (43.5/-50.0)

D Dade Co. Approved *P-xxxx = Drawing Number

Panel Options*

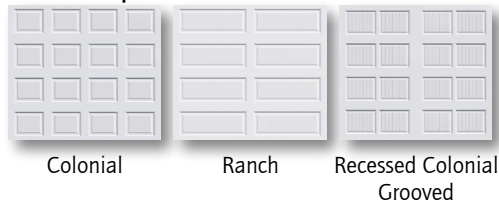


Colors

Solid Color Options



The swatches shown on monitors and printed materials may vary from the actual color. For a true representation of the color, visit your local Raynor Dealer.

Optional Post Paint Finish*

 Raynor's ColorWave™ features Sherwin-Williams® next generation post paint system for your garage door. With 1,500 colors to choose from, home and business owners can couple this elite paint system with state of the art Raynor manufacturing to craft the perfect look for their home or project.

*Not all colors are available in solar reflective paint, colors that are not available as solar reflective cannot be used on polyurethane doors.

Hardware



Galvanized Steel

The galvanized hardware come standard on TradeMark doors.



Professional Installation and Service

Depend on your Raynor Dealer

When you select Raynor, you're not just getting a superior garage door - you're also getting professional garage door installation and service expertise.

Every Raynor garage door is installed by a trained Raynor professional, and that means added benefits for you. First, you won't have to deal with it yourself. Second, because it's done right the first time, your door will deliver performance and reliability from the day it's installed. Your technician will check your door for everything from safety to performance and appearance. Trust your Raynor garage door to someone who knows it better than anyone else, your professional Raynor Dealer.

Exclusively Distributed by:

Follow Us

